



# High Density Linear Polyethylene Double Wall Tank DCS Value-Paks



Silver Pak



**Gold Pak** 



**Platinum Pak** 

Double Containment Tanks are manufactured from a high purity FDA approved HDPE (High Density Linear Polyethylene) resin. HDPE tanks have superior chemical resistance, extreme durability and excellent UV stabilizers, making them an ideal choice for a wide range of applications from food processing and semiconductor to heavy duty industrial chemical storage. All of our tanks are also NSF 61 compliant.

HDPE resins are weldable, allowing for installation of welded process nozzles from 1/2" to 14" and larger if required. HDPE allows us to weld our DCS Double Walled Tank Systems together, making them a true one-piece double walled containment system.

Our tanks are rated for temperatures up to 120°F and higher with special upgraded enhancements upon request.

Our standard tanks are rated for 1.5 Specific Gravity contents. We offer 1.9 SPG tanks upon request.

Tank Packages designed with our most popular options making Dual Containment Tank Systems simple, feature rich and easy to order.








Custom Designed and Engineered Tank Solutions High Quality Polyethylene Dual Containment Tanks.

# Peabody Engineering's Double Wall Value-Paks

Making Life Easier One Tank at A Time

- Gold or Platinum upgraded packages include features of preceding package(s) plus new upgraded features.
- Prices do not include shipping or tax.
- Fittings are available in 1" or 2" sizes; Larger sizes available upon request.
- For questions/information please call 1-800-4-PEABODY.

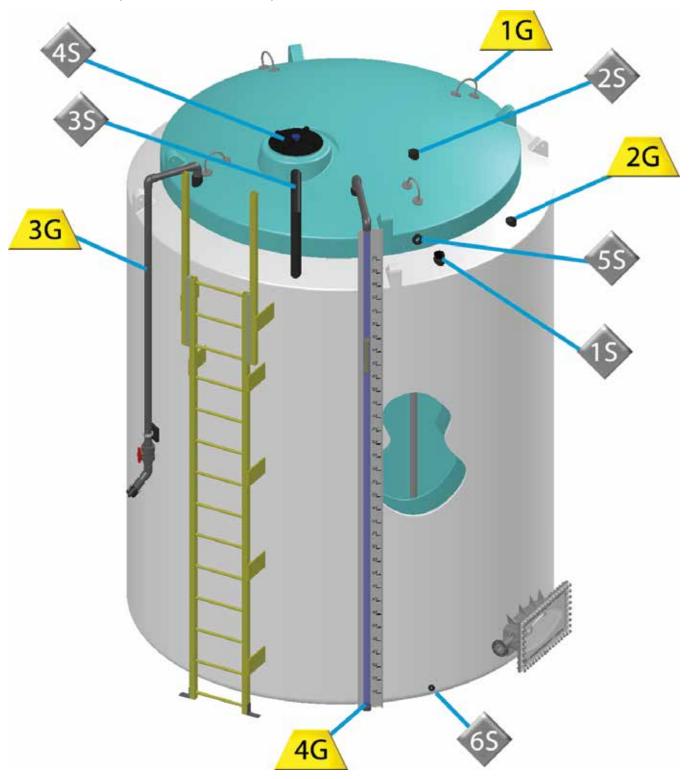

Tank drawing is for representation only; actual tank and features may differ.



Key ID #	Part	Silver Description
-	Plastic Fittings	Your choice of PVC or PPL. Plastic fittings won't corrode or rust over time and are very durable
-	CAD Drawings	CAD Submittal Drawings are provided to ensure the tank meets the needs of your application
-	Shipping Prep	Includes heavy duty shrink wrap to protect your tank from the elements during transit
1S	2" Mushroom Vent	(2) Vents installed for interstitial venting
28	2" Top Drain Outlet	FPT drain connection with diptube allows for quickly emptying primary tank
38	2" Overflow	In case primary capacity is exceeded, liquid drains into interstitial secondary space
48	18" OD Lid	Standard vented twist lid vents up to 450 gallons per minute during discharge or filling
5S	2" Fill	FPT fill connection high on tank sidewall
6S	1" Drain with Plug	Drain for secondary containment interstitial space, without disrupting liquid being held in primary. Optional shut off valve available



## **Gold Pak Features**



Key ID #	Part	Gold Description
-	Silver Features	All features of Silver Pak are included with the following changes/additions
-	Polyethylene Welded Flanges or Couplings*	All Gold Tank's fittings are extrusion welded and gasketless. Welded fittings provide for industrial grade reliability for all of your tank connections. Made from 100% polyethylene, these fittings are custom fabricated for optimum performance and chemical resistance
1G	Lifting Lugs	Zinc plated lugs allow quick installation of tank by attaching and hoisting tank into position
2G	Leak Detector	Optical leak detector alerts you of possible leak in secondary interstitial containment space
3G	Drop Fill Line	Installed into Silver 2" Fill (5S), 42" up from the ground level for easy filling of tank. Includes ball valve, check valve, and PPL quick coupler and cap
4G	Inverse Level Gauge	Standard with fiberglass encapsulated calibration chart in gallons to easily check fluid level from exterior of tank
		*If desired, Stainless Steel Bulkhead fittings can be substituted at no additional cost

### **Additional Double Wall Features and Adders**

Additional options including seismic restraint systems, heating and insulation, fiberglass wraps, level control, etc. are available at an additional cost.

### **Capacities and Part Numbers**


Name	Avail	Diameter	Height	Silver PN	Gold PN	Platinum PN
750 Gal DCS Value-Pak	Α	64"	111"	293-33397	293-33398	293-33399
1000 Gal DCS Value-Pak	Α	87"	67"	293-33400	293-33401	293-33402
1100 Gal DCS Value-Pak	Α	95"	53"	293-29171	293-29185	293-29199
1500 Gal DCS Value-Pak	Α	87"	95"	293-29172	293-29186	293-29200
2100 Gal DCS Value-Pak	Α	95"	89"	293-29173	293-29187	293-29201
2500 Gal DCS Value-Pak	Α	102"	91"	293-29174	293-29188	293-29202
3000 Gal DCS Value-Pak	Α	102"	109"	293-29175	293-29189	293-29203
5000 Gal DCS Value-Pak	Α	119"	152"	293-29177	293-29191	293-29205
6000 Gal DCS Value-Pak	W	119"	182"	293-29178	293-29192	293-29206
6500 Gal DCS Value-Pak	Α	141"	150"	293-29179	293-29193	293-29207
7800 Gal DCS Value-Pak	W	141"	176"	293-29180	293-29194	293-29208
8400 Gal DCS Value-Pak	Α	141"	188"	293-29181	293-29195	293-29209
10500 Gal DCS Value-Pak	Е	141"	202"	293-29182	293-29196	293-29210

Availability Key: A=All; W = West Coast - Corona CA; E = East Coast - Liberty SC

Engineered Seismic/Wind Restraint packages and additional tank capacities are available. Contact Customer for further information 1-800-4-PEABODY or email us at Sales@4Peabody.com.



Key ID #	Part	Platinum Description
-	Silver and Gold Features	Platinum Pak includes all features of Gold Pak plus those seen and listed below (FRP Ladder and Side Access Box)
1P	FRP Ladder	FRP Ladders are OSHA compliant, corrosion resistant and attaches directly to tank for easy top access. All ladder systems come with required hardware included.
2P	Side Access Box	Peabody Engineering's unique Side Access Box has a clear cover for visual interstitial leak detection. The flex-hose interconnection system allows for safe movement between the tank walls without putting stress on the lower drain outlet.

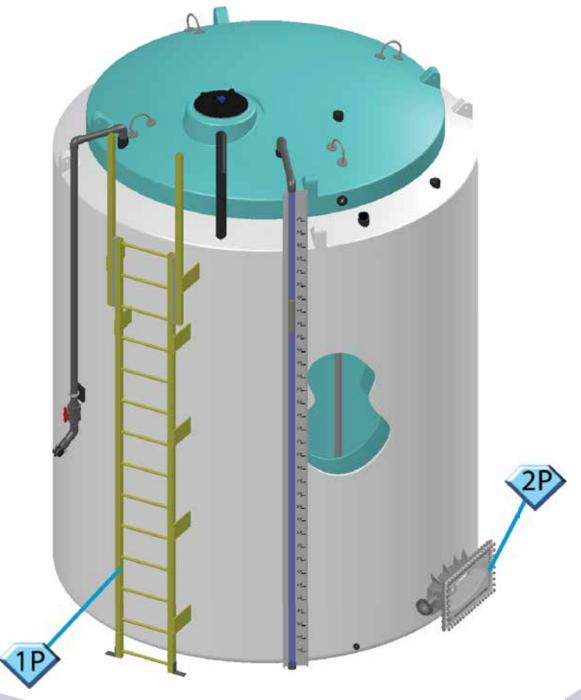

Tank drawing is for representation only; actual tank and features may differ.



DISTRIBUTED BY